



# UNG80-12 (12V80Ah/20hr)



UNG Series is GEL battery which is manufactured with AGM separator and colloidal Silicon. Gel battery are featured with low self-discharge , strong ability to recover from deep discharging , excellent cycle life and performance at cold ambient temperatures than conventional VRLA

## Battery Construction


Component	Positive plate	Negative plate	Container	Cover	Safety valve	Terminal	Separator	Electrolyte
Raw material	Lead dioxide	Lead	ABS	ABS	Rubber	Copper	Fiberglass	Colloidal silicon

## General Feature

- Micro millimeter SiO<sub>2</sub> and H<sub>2</sub>SO<sub>4</sub> technology for Efficient gas recombination of up to 99% and Freedom from electrolyte maintenance or water adding.
- Not restricted for air transport-complies with IATA/ICAO Special Provision A67.
- UL-recognized component.
- Can be mounted in any orientation.
- Computer designed lead, calcium tin alloy grid for high power density.
- Long service life, float or cyclic applications.
- Maintenance-free operation.
- Low self discharge.

## SPECIFICATION

Nominal voltage ..... 12V  
 Number of cell ..... 6  
 Length(mm/inch) ..... 350/13.78  
 Width(mm/inch) ..... 167/6.57  
 Height(mm/inch) ..... 179/7.05  
 Total Height(mm/inch) ..... 179/7.05  
 Approx. Weight(kg/lbs) ..... 22.0/48.5

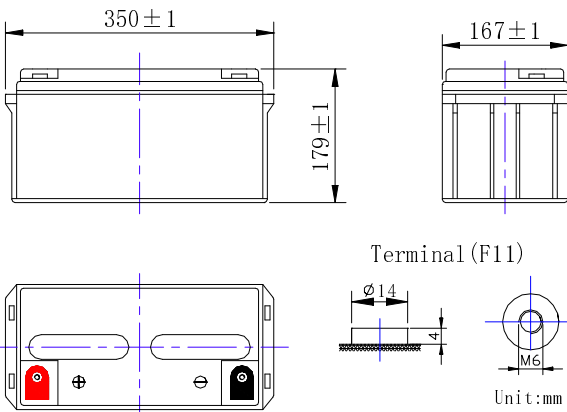

## Performance Characteristics

Capacity 77°F(25°C)	100 hour rate (1A、 11.1V)	100Ah
	20 hour rate (4A、 10.8V)	80Ah
	10 hour rate (7.5A、 10.5V)	75Ah
	1 hour rate (48A、 9.6V)	48Ah
Internal Resistance	Full charged Battery77°F(25°C):11mΩ	
Operating Temperature Range	Discharge: -20~60°C	
	Charge: -10~60°C	
	Storage: -20~60°C	
Self-Discharge 3% of capacity declined per month at 20°C(average)		
Max. discharge current77°F(25°C): 800A(5S)		
Charge (Constant Voltage)	Float: 13.38~13.68 V/77° F(25°C)	
	Cycle:14.28~14.52 V/77°F/(25°C) Max. Current: 20A	









Discharge Constant Current (Amperes at 77° F 25 °C)

End Point Volts/Cell	5min	10min	15min	30min	1h	3h	5h	10h	20h
1.60V	233	176	138	82.0	48.0	20.1	13.7	7.70	4.20
1.65V	220	168	132	78.5	46.6	19.7	13.6	7.60	4.20
1.70V	206	159	126	74.3	45.2	19.2	13.4	7.60	4.15
1.75V	192	149	120	69.6	43.8	18.7	13.2	7.50	4.10
1.80V	179	139	112	64.4	42.3	18.0	12.8	7.30	4.00

Discharge Constant Power (watts at 77° F 25 °C)

End Point Volts/Cell	5min	10min	15min	30min	45min	1h	2h	3h	5h
1.60V	416	310	263	150	117	96.0	53.8	39.2	27.1
1.65V	395	299	250	148	115	93.9	52.7	36.4	26.6
1.70V	374	287	236	145	112	92.2	51.7	35.7	26.2
1.75V	353	276	223	143	109	90.3	50.8	35.0	25.6
1.80V	333	264	209	140	106	88.6	49.9	34.4	25.0

(Note)The above characteristics data are average values obtained Within three charge/discharge cycles not the minimum values.

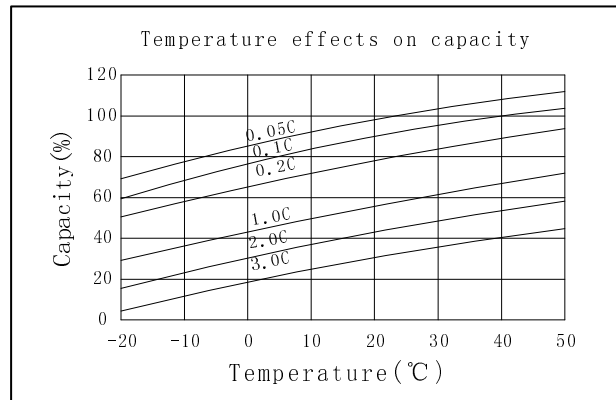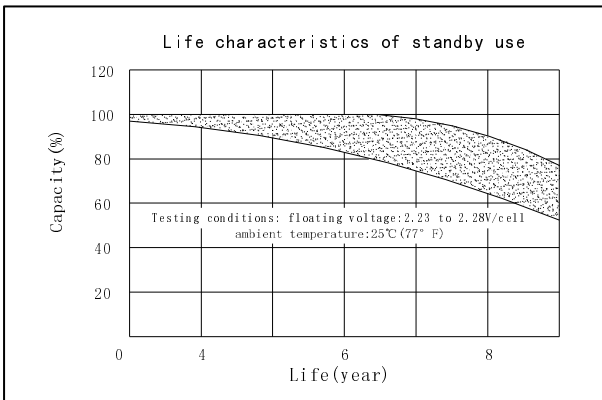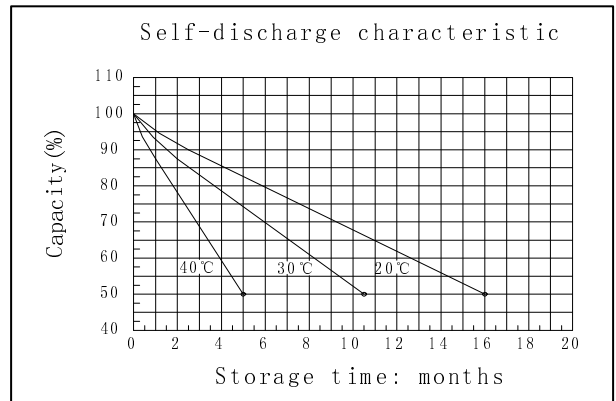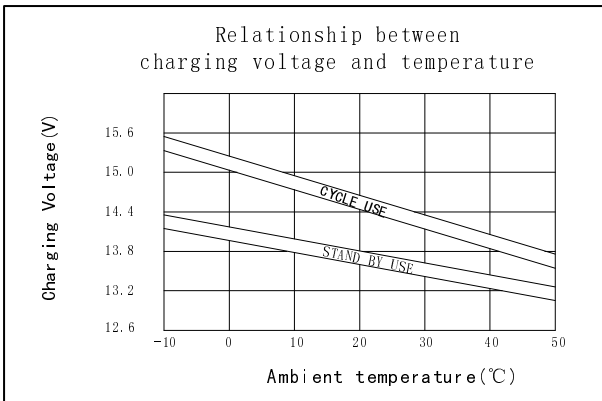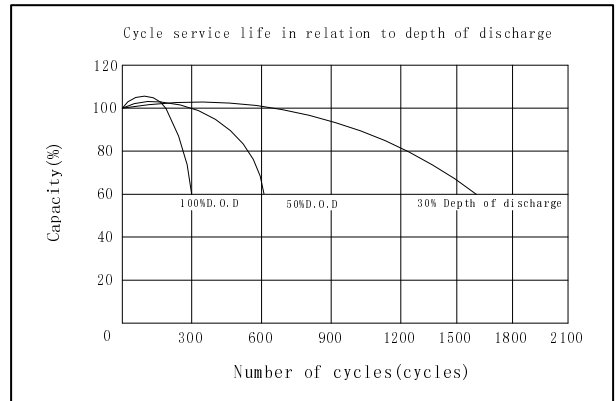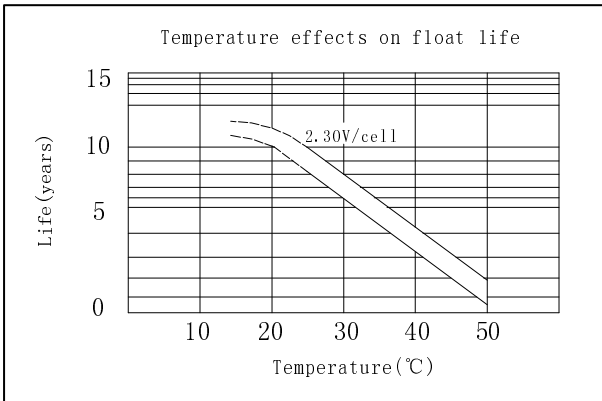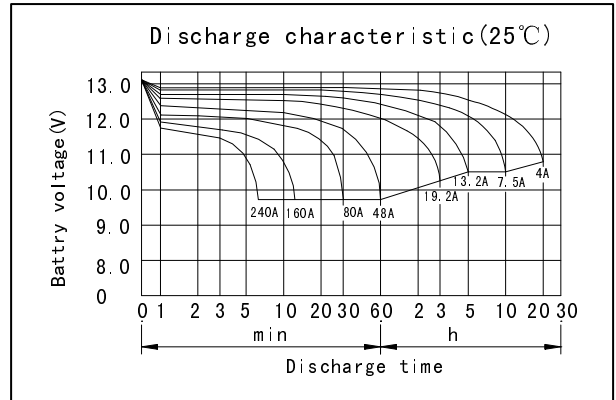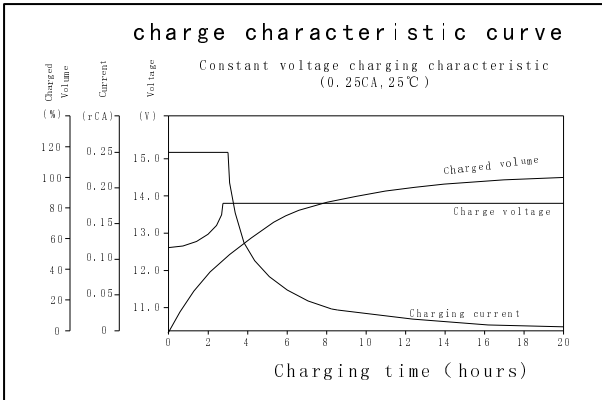

**OREMA POWER CO., LTD**

Add: Datang Industry Park Xinfeng Ganzhou City, Jiangxi Province, China

TEL: +86-0797-2299669 +86-0797-2299553

FAX: +86-0797-2299553



[www.oremabattery.com](http://www.oremabattery.com)